



INVESTOR IN PEOPLE



GB 00/3757

4

# **PRIORITY DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road

Newport

South Wales 01 NOV 2000

NP10 8QQ

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that by virtue of an assignment registered under the Patents Act 1977, the application is now proceeding in the name as substituted.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 17 OCT 2000



INVESTOR IN PEOPLE

GB9923226.6

By virtue of a direction given under Section 30 of the Patents Act 1977, the application is proceeding in the name of

MARCONI APPLIED TECHNOLOGIES LIMITED

One Bruton Street


London

W1X 8AQ

United Kingdom

[ADP No. 07803513001]

1977  
(Rule 16)

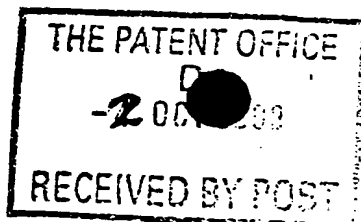

The Patent Office

E480967-1 006236  
P01 1700 0.00 - 9923226.6

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference **P/61996.GBA/VPOW**

2. Patent application number  
(The Patent Office will fill in this part)

**9923226.6**

3. Full name, address and postcode of the or of each applicant (underline all surnames)  
Patents ADP number (if you know it)  
If the applicant is a corporate body, give the country/state of its incorporation

SECTION 1187 ACT APPLICATION  
**EEV Limited**  
**Waterhouse Lane**  
**Chelmsford**  
**Essex CM1 2QU**  
**United Kingdom**

385002  
FILED 21.02.00

4. Title of the invention  
**High Frequency Apparatus**

5. Name of your agent (if you have one)  
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

~~G. Cockayne~~  
**GEC Patent Department,**  
**Waterhouse Lane, Chelmsford,**  
**Essex CM1 2QX**

**Marconi Intellectual Property**

Patents ADP number (if you know it)

**1009133003**

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body
- See note (d)

**YES**

# High Frequency Apparatus

This invention relates to high frequency apparatus and more particularly, but not  
 5 exclusively, to apparatus which includes a high frequency resonant cavity tuning member  
 which is moveable to vary the volume, and hence resonant frequency, of a cavity.

High frequency devices, such as, for example klystrons and inductive output tubes  
 (IOTs), include resonant cavities in which energy of appropriate frequency is contained,  
 10 electrical current moving over the interior surfaces of the cavity. The resonant frequency of a  
 cavity may be tuned by altering its volume, one or more walls of the cavity being moveable  
 relative to the other walls. A moveable wall of this type is commonly referred to as a "tuning  
 door". In order for the cavities to have an effectively continuous electrical surface at the high  
 frequencies involved, spring fingers are attached to the tuning door or doors and are pushed  
 15 into contact with the adjacent fixed walls. This mechanism gives the required electrical  
 connection whilst permitting movement of the tuning door.

Figure 1 schematically shows a known tuning door arrangement for a resonant cavity  
 in which a tuning door 1 is moveable, in the directions shown by the arrows, relative to  
 20 surrounding walls 2. The tuning door 1 has an active surface 3 that is, an interior surface of  
 the cavity over which current flows. Strips of spring contact fingers, three of which are  
 shown at 4,5 and 6, are clamped to the rear surface of the door 1 via screw 7 and clamping  
 plates 8. The screws 7 provide an electrical path between the interior active surface 3 of the  
 tuning door 1 and the contact fingers 4, 5 and 6. The contact fingers 4, 5 and 6 bear against  
 25 the surrounding walls 2 to provide electrical connection thereto. Strips are distributed around

the entire periphery of the tuning door 1. In the arrangement shown in Figure 1, one strip is fastened to each edge of the tuning door 1. In other more complex shaped tuning doors, several strips of contact fingers may be required along an edge of a door.

According to a first aspect of the invention, high frequency apparatus comprises a moveable wall having a support which carries an electrically conductive plate, being an active surface during use, with a plurality of contact fingers at the periphery of the wall which are integral with the conductive plate.

By "active surface" it is meant that the surface forms part of a cavity or transmission line for high frequency radiation.

By using the invention, fabrication of cavity tuning doors or other moveable components is greatly simplified compared to prior art assemblies. The contact fingers around the periphery of the conductive plate may be formed in a single operation. This contrasts with a conventional construction in which a plurality of separate strips of electrical contact fingers are separately manufactured and are then individually screwed to the cavity tuning door, each strip requiring several screws to hold it in position to the door. In the present invention, all of the electrical contact fingers may be fixed to, say, a cavity tuning door in one operation. Another advantage is that because the fingers are integral with the conductive plate, there is optimum electrical connection between them, unlike the previous arrangement where there is a risk that the strips are not properly connected to the front active surface.

The electrical contact fingers should be sufficiently flexible and springy so as to provide a good electrical contact with surrounding surfaces and thus the conductive plate should be sufficiently thin and of a suitable material to achieve this.

5 The support may provide a complete backing member to the conductive plate, being of substantially the same area and shape as the plate. In alternative embodiments, however, the support may be provided by a framework, reducing the material required and the weight of the apparatus.

10 Preferably, a single conductive plate covers the entire region of the wall. However, a plurality of plates may be fixed to the support to define the active surface. This however introduces additional fabrication steps and it is important for good electrical performance that adjoining plates are accurately aligned with one another. Where several conductive plates are used for a single moveable wall, electrical contact fingers will be provided around only part of the periphery of each plate.

20 The invention is particularly applicable to resonant cavity tuning doors but it may also be used in other types of apparatus where electrical connection is required by the use of contact fingers. For example, it may find use for altering the length of waveguide terminations or in screening apparatus such as a Faraday cage, to shield from external electrical influences.

According to a second aspect of the invention, a method for manufacturing a moveable wall for high frequency apparatus includes the steps of taking a plate of conductive

material; forming contact fingers at the periphery of the plate; and then mounting the plate on a support.

Typically, the plate is of beryllium copper and following the formation of the fingers and any subsequent bending to form the fingers into the right configuration to give a spring "spoon" shape, the plate is gold or silver plated. This gives a good electrically conductive active surface and reduces or eliminates atmospheric tarnishing. The plate may be silver plated and the tips of the contact fingers gold plated.

The fingers may preferably be formed by etching for example by photo etching, giving good accuracy as this can be computer controlled. Other techniques involving cutting or stamping could be used instead.

The design flexibility afforded by the invention permits the configuration of the fingers and/or their spatial distribution to be quite complex if necessary, for example to take into account the configuration of the moveable wall in the finished apparatus. For example, where the wall is curved, the finger profiles may vary along the periphery to give a more uniform distribution of contact points in the final assembly.

The plate may be fixed to the support by, for example, double-sided adhesive tape, fastenings through the plate, clamping the plate to the support, or any other convenient arrangement. Alternatively, a liquid adhesive may be applied to the rear surface of the plate and/or to the support and subsequently cured. An advantage of using liquid adhesive or adhesive tape is that it allows the plate to be attached to the support in one step in the

assembly process, and additional fixation components are not required.

Some ways in which the invention may be performed are now described by way of example with reference to the accompanying drawings in which:

Figures 2 to 5 schematically illustrate the steps in a method of manufacturing a tuning door for a resonant cavity included in high frequency apparatus;

Figure 6 schematically shows the finished apparatus tuning door in situ in a resonant cavity, only part of which is shown; and

Figures 7 and 8 schematically illustrate in plan view other tuning doors in accordance with the invention.

In a method of fabricating a cavity tuning door and with reference to Figure 2 which is a plan view, firstly, a rectangular plate 9 of beryllium copper is taken. This is etched using conventional photo etching techniques to define a plurality of fingers 10 around the periphery of the plate as shown in Figure 3, also a plan view. In this case, the fingers 10 are formed around the entire periphery of the plate 9. Following this step, the fingers 10 are bent at right-angles to the plane of sheet and their ends further curved to give the spring "spoon" shape, as shown in Figure 4 which is an isometric view. The plate is then silver plated to give a good conductive surface.

As shown in Figure 5, double-sided adhesive tape 11 is then applied to the surface of a support 12, the plate 9 and support 12 being illustrated with their major surfaces normal to the page. In this case the support 12 has the same shape as the tuning door in the finished device. It has two flat planar parts 12A and 12B and a central part-cylindrical part 12C. The



plate 9 is offered up and fixed to the support 12 by means of the adhesive tape 11, to thus form the tuning door 14.

As shown in Figure 6, the tuning door 13 is then incorporated into the resonant cavity, being moveable in the directions shown by the arrows by means of mechanism 14 at the rear of the support 12.

Figure 7 shows an alternative arrangement, in which the support consists of an open framework 15 on which the plate 16 is mounted, the contact fingers being indicated at 17. The tuning door is of similar shape to that shown in Figure 6, having a central part-cylindrical part.

In another arrangement shown in Figure 8, the conductive surface 18 of a tuning door 19 is formed from several separate conductive plates 20, 21, 22, 23 and 24 located adjacent one another. Each of these conductive plates 20 to 24 has fingers 20A to 24A formed along only part of its periphery.

Claims

1. High frequency apparatus comprising a moveable wall having a support which carries an electrical conductive plate, being an active surface during use, with a plurality of contact fingers at the periphery of the wall which are integral with the conductive plate.

5

2. Apparatus as claimed in claim 1 wherein the support is substantially the same area and shape as the conductive plate.

3. Apparatus as claimed in claim 1 wherein the support is a framework.

10

4. Apparatus as claimed in claim 1, 2 or 3 wherein a single conductive plate defines the active surface of the moveable wall.

5. Apparatus as claimed in any preceding claim wherein contact fingers are included around the entire periphery of the moveable wall.

6. Apparatus as claimed in any preceding claim wherein the moveable wall is a tuning door for a resonant cavity.

20

7. A method for manufacturing a moveable wall for high frequency apparatus including the steps of: taking a plate of conductive material; forming contact fingers at the periphery of the plate; and then mounting the plate on a support.

8. A method as claimed in claim 7 wherein the fingers are formed by photoetching.

9. An apparatus or a method as claimed in any preceding claim wherein the conductive plate is of beryllium copper.

10. A method or apparatus as claimed in claim 9 wherein the plate is gold or silver plated.

11. A method or apparatus as claimed in any preceding claim wherein the plate is fixed to the support by adhesive.

12. A method or apparatus as claimed in claim 11 wherein the plate is fixed to the support by adhesive tape.

13. A high frequency apparatus substantially as illustrated in and described with reference to Figures 6, 7 or 8 of the accompanying drawings.

14. A method substantially as illustrated in and described with reference to Figures 2 to 8 of the accompanying drawings.

ABSTRACTHigh Frequency Apparatus

In a method of fabricating a tuning door for a resonant cavity, firstly contact fingers 10 are formed around the edge of a conductive plate 9 and the plate 9 is then fixed to a support 12 by, for example, double sided adhesive tape 11. The conductive plate 9 is part of the interior surface of the resonant cavity. The fingers may be formed in one operation, for example, by photo etching and are fully integral with the active surface to give optimum electrical conduction between them. Other types of high frequency apparatus where contact fingers are used to provide electrical conduction between a moveable wall and an adjacent conductive surface may also make use of the invention.

Figure 5

FIG. 1

1/4

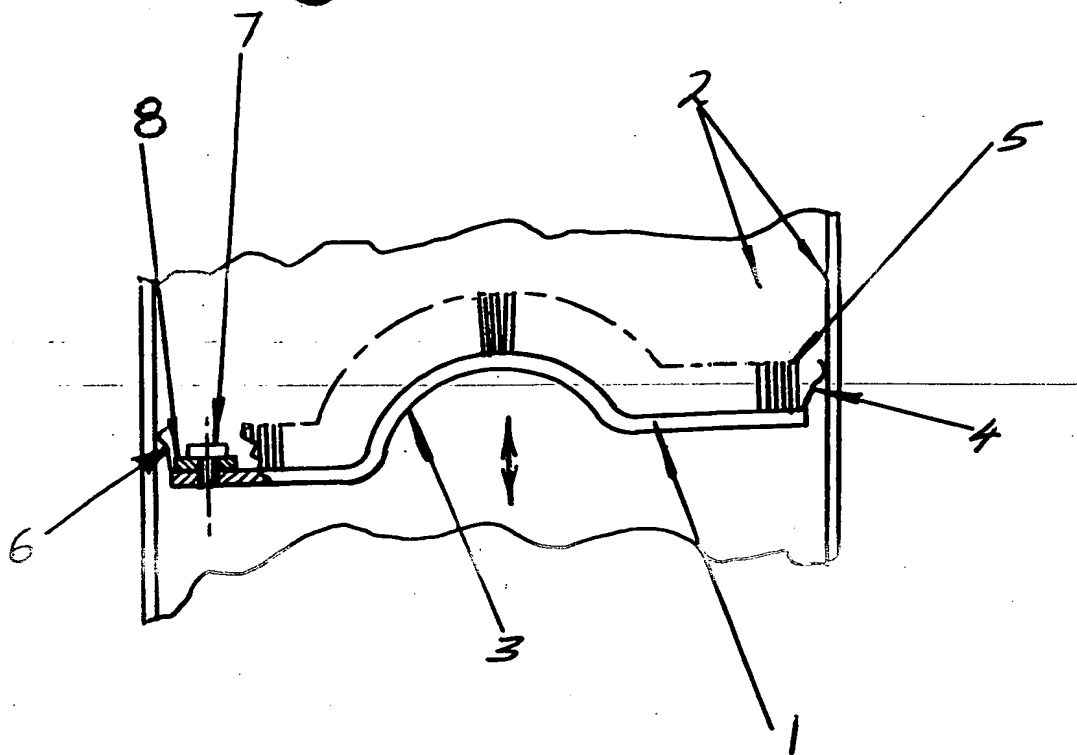


FIG. 2

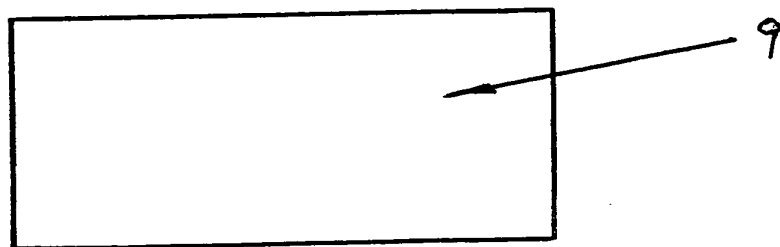


FIG. 3

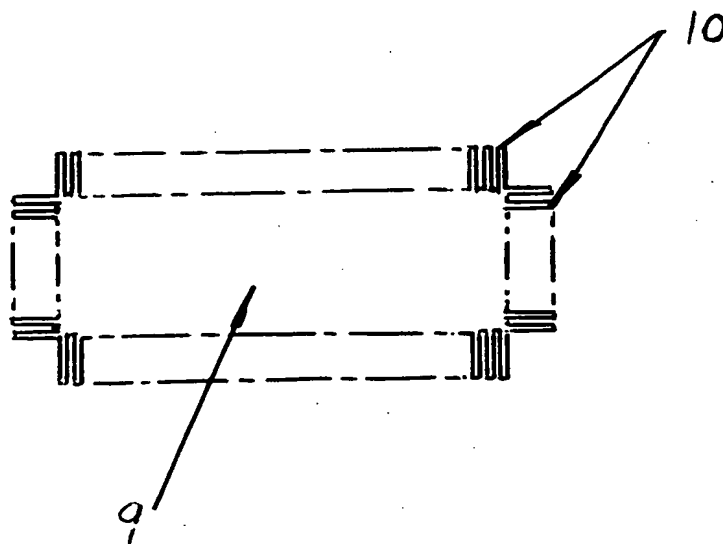


FIG. 4


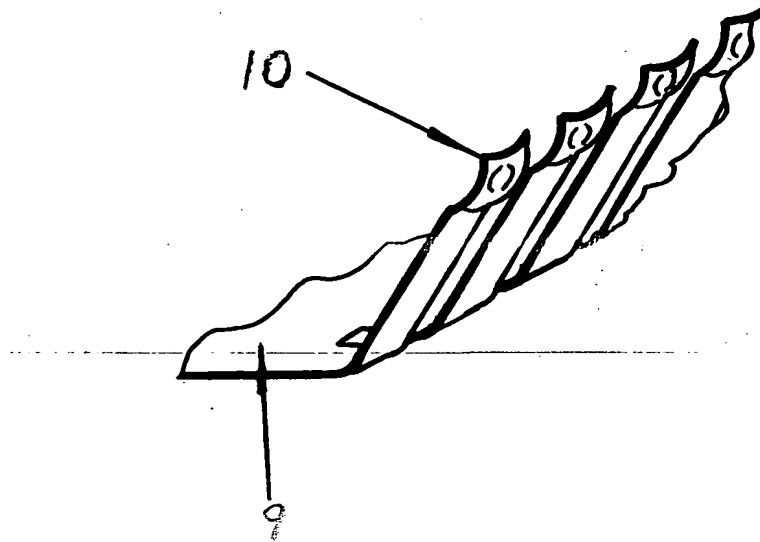


FIG. 5

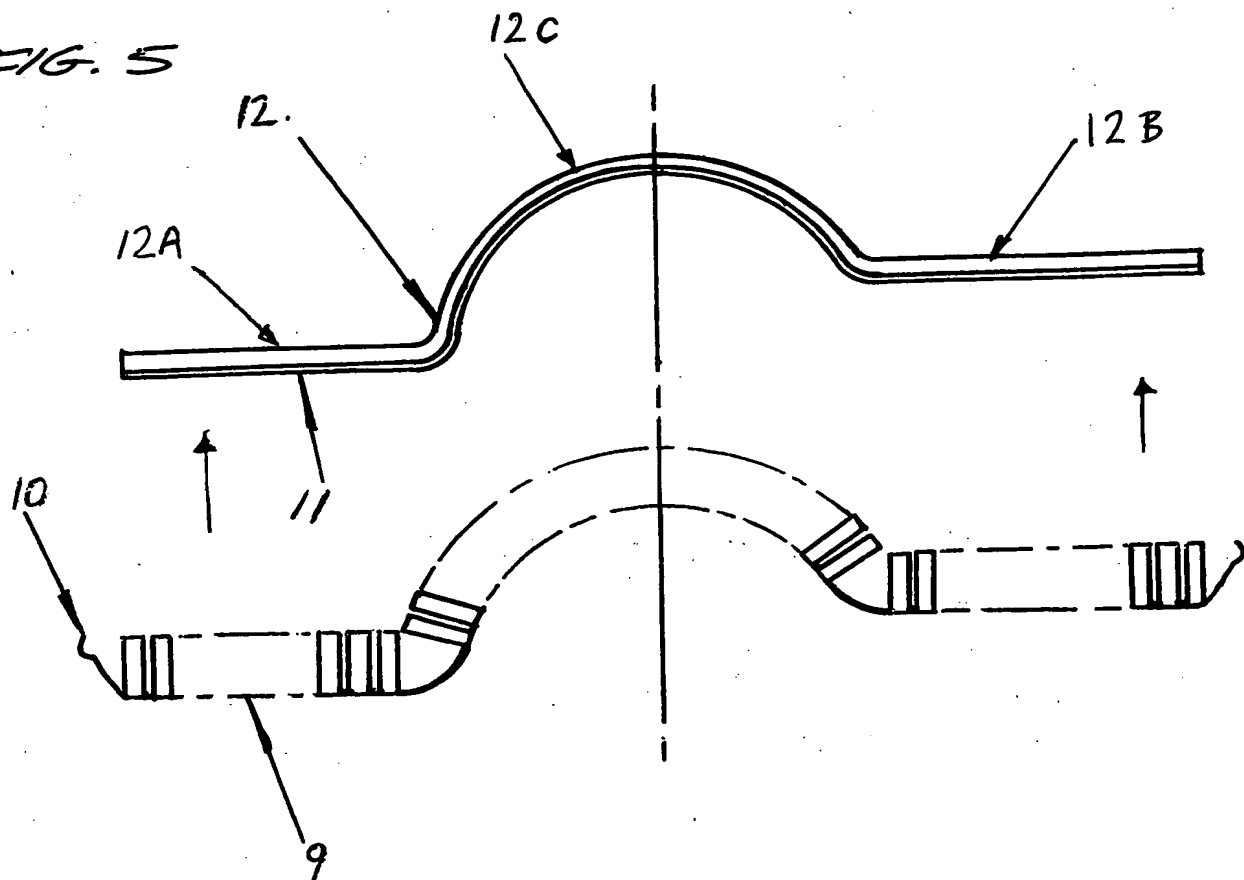

3/4

FIG. 6

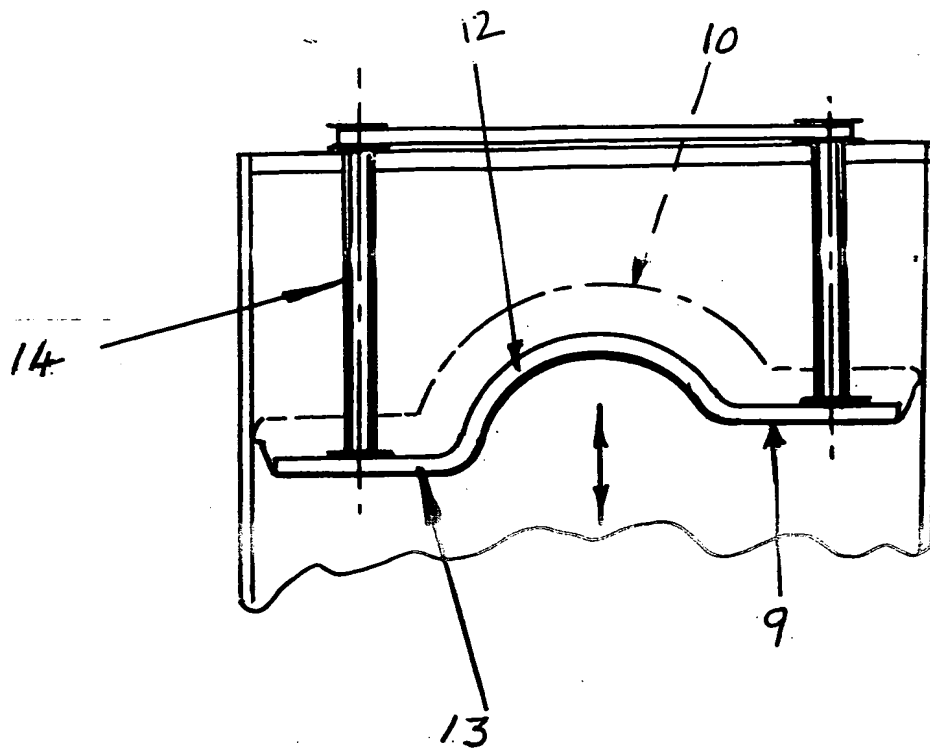


FIG. 7

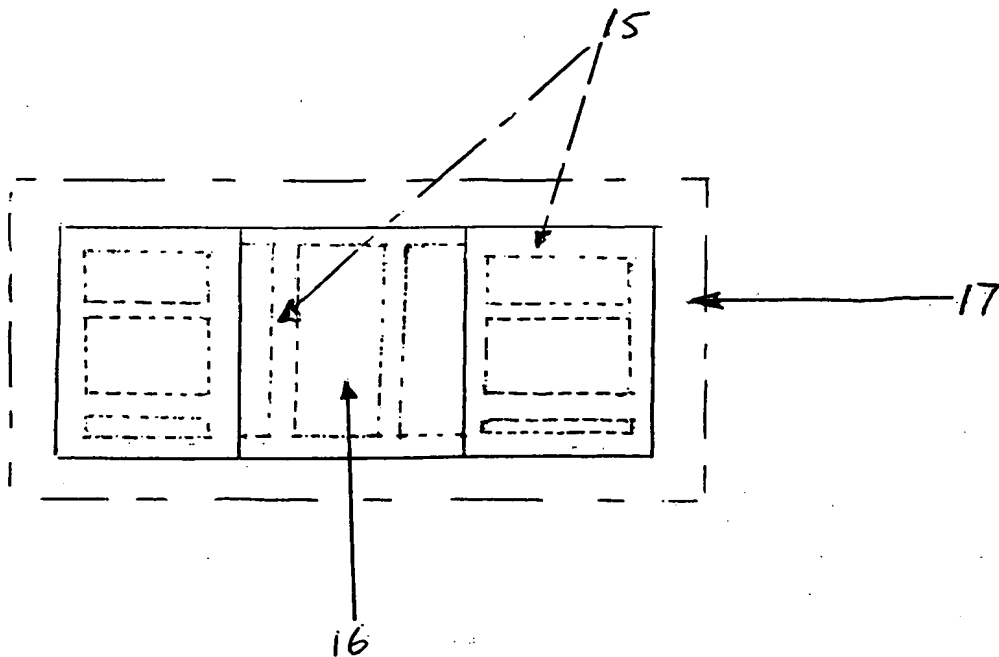


FIG. 8

